


# STEEL PARK LAMPS

## TUBULAR PARK LAMP POLES ØD<sub>E</sub>-160

PARK LAMP  
TUBULAR

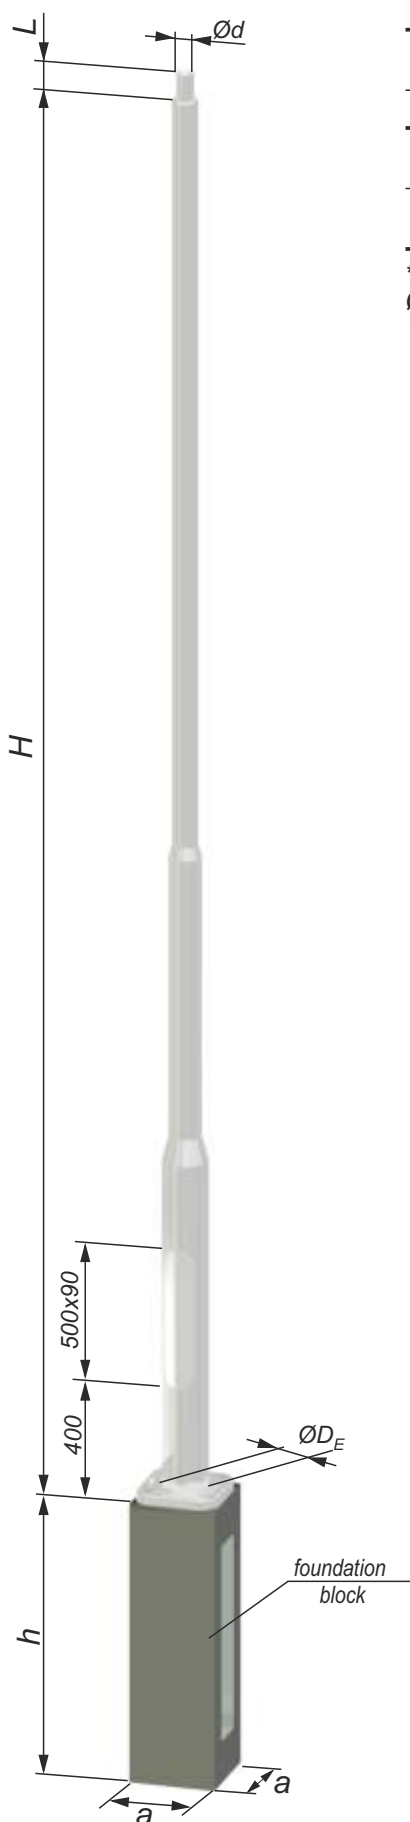

Technical data						
TYP	H	t <sub>bl</sub>	Ød/D <sub>E</sub>	L	m	a x a x h TYP
	m	mm	mm	mm	kg	m
S-40SRw/Ø160	4,0	4	60/160	100	55,0	0,3 x 0,3 x 1,0 (0,75)* F100/200 (F75/200)*
S-50SRw/Ø160	5,0				67,5	0,3 x 0,3 x 1,0 F100/200

\* - The foundation type depends on the poles load

Ød - other mounting diameters must be specified in the inquiry or order.

Note: The number of diameter reductions depends on the poles type.

Strength data						
TYPE	Lamp fixture	Wind Zone, PN EN 1991-1-4				M <sub>F</sub>
		Permissible lamp fixture surface [m <sup>2</sup> ]				
	kg	I	I	II	III	kNm
		≤300m a.s.l.	≤500m a.s.l.	≤300m a.s.l.	≤950m a.s.l.	
S-40SRw/Ø160	50	2,974	2,267	2,087	1,543	9,0
S-50SRw/Ø160	50	2,106	1,582	1,451	1,057	9,0