


STEEL STREET LAMPS

STRAIGHT TUBULAR STREET LAMP POSTS > D_E

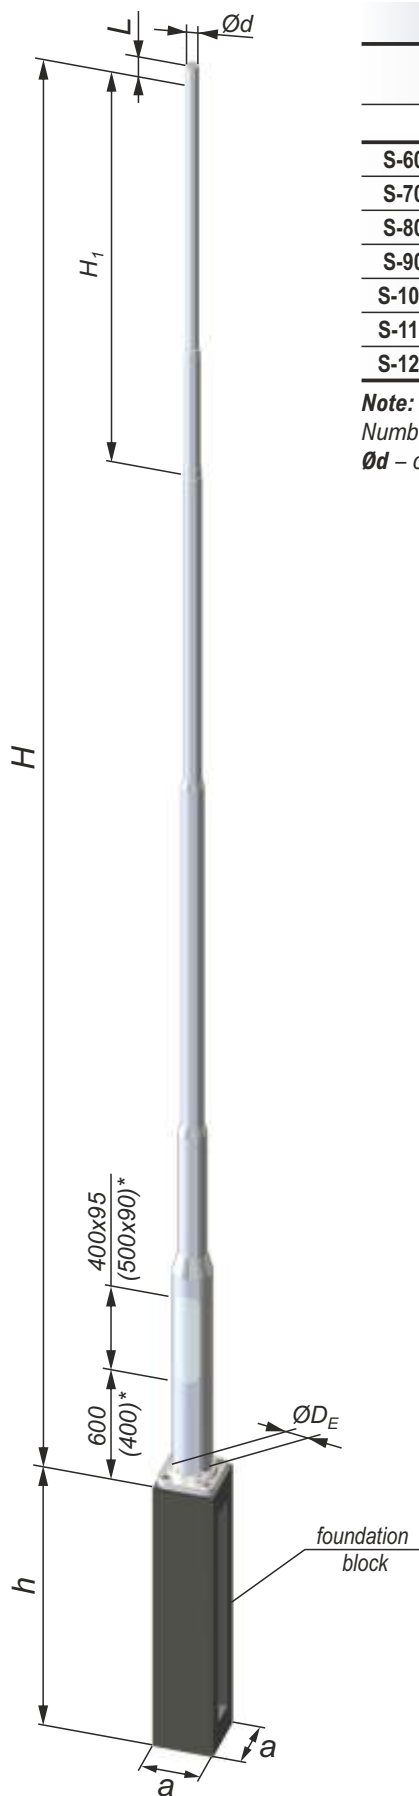

Technical data								
TYPE	SHAFT TYPE	H	t _{bi}	H ₁	Ød/D _E	L	m	a x a x h TYPE
		m	mm	m	mm	mm	kg	m
S-60SRwP/Ø160/Ø70	T S-60SRw/160/Ø70	6,0			60/160		63,0	0,3 x 0,3 x 1,0
S-70SRwP/Ø160/Ø70	T S-70SRw/160/Ø70	7,0					76,0	F100/200
S-80SRwP/Ø196/Ø70	T S-80SRw/196/Ø70	8,0			60/196	100	93,0	0,3 x 0,3 x 1,5 F150/200
S-90SRwP/Ø196/Ø70	T S-90SRw/196/Ø70	9,0	4	2,2			104,0	
S-100SRwP/Ø196/Ø70	T S-100SRw/196/Ø70	10,0					110,0	
S-110SRwP/Ø196/Ø70	T S-110SRw/196/Ø70	11,0					123,0	
S-120SRwP/Ø196/Ø70	T S-120SRw/196/Ø70	12,0					129,0	

Note: H₁ – straight street poles extension piece, ordered as separately.
Number of reductions depend on the type of street poles.
Ød – other mounting diameters must be specified in the inquiry or order.

STREET LAMPS
STRAIGHT TUBULAR

Strength data						
TYPE	Lamp fixture	Wind Zone, PN EN 1991-1-4				M _F
		Permissible lamp fixture surface [m ²]				
	kg	I	I	II	III	kNm
		≤300m	≤500m	≤300m	≤950m	
		a.s.l.	a.s.l.	a.s.l.	a.s.l.	
S-60SRwP/Ø160/Ø70	50	1,479	1,093	0,995	0,702	9,0
S-70SRwP/Ø160/Ø70	50	1,042	0,745	0,671	0,453	9,0
S-80SRwP/Ø196/Ø70	50	1,518	1,128	1,024	0,716	14,2
S-90SRwP/Ø196/Ø70	50	1,163	0,830	0,746	0,503	14,2
S-100SRwP/Ø196/Ø70	50	0,818	0,589	0,520	0,326	14,2
S-110SRwP/Ø196/Ø70	50	0,614	0,394	0,339	0,189	14,2
S-120SRwP/Ø196/Ø70	50	0,424	0,241	0,194	0,073	14,2

* - sizes listed for H ≤ 7m posts